

SPECIFICATIONS

Model	GLS-2000				
Scanning Part					
Measurement Method	Pulse (Time of Flight)				
Distance	Detail	High Speed	Low Power	Standard	Close
Reflectivity 90%	100m	210m	210m	350m	-
Reflectivity 18%	40m	90m	90m	150m	-
Reflectivity 9%	-	-	-	-	40m
Laser	1064nm				
Laser Class	3R		1M	3R	
Scanning Density (Resolving Power)					
Spot Size(FWHM)	$\phi \leq 4\text{mm}$	$\phi \leq 11\text{mm}$			
	1 to 20m	1 to 150m			
Point Increment	Minimum 3.1mm (At 10m)				
Maximum Point Number	V:15,202 Pt/Line (270°) H:20,268 Pt/Line (360°)				
Field of View	V:270° / H:360°				
Angle Accuracy	H: 6" / V: 6"				
Distance Accuracy	3.5mm (σ) At 1 to 90m	3.5 mm (σ) At 1 to 110m	4.0mm (σ) At 1 to 110m	3.5mm (σ) At 1 to 150m	3.5mm (σ) At 1 to 40m
Surface Accuracy	2.0mm (σ)				
Height Measurement	At 1 to 90m At 1 to 110m At 1 to 110m At 1 to 150m At 1 to 40m				
Measuring Range	0.3 to 2.0m				
Measuring Accuracy	3.0mm (Req. Special Target)				
Camera Part					
Field Angle	Wide : Diagonal 170° Tele. : 8.9°(V) x 11.9°(H)				
Number of pixels	Both Wide & Tele. 5megapixels				
Tilt Sensor					
Type	Liquid 2-axis tilt-sensor				
Compensation Range	±6'				
Display Unit					
Type	TFT-LCD 3.5 VGA with touch-panel				
Others					
Laser Plummet	Spot Size $\phi 1\text{mm}$ (1m) / $\phi 4\text{mm}$ (1.5m)				
Imaging Plummet	Magnification range 1m				
Interface					
Card Slot	SD card (SDHC Class 6 or more)				
Power Supply					
Internal Battery	BDC70				
Capacity	5240mAh / 1pce x 4pcs				
Nominal Voltage	7.4V / 1pce x pcs				
Working Duration	2.5 hours (4pcs continuous scanning)				
Appearance					
Dimension	228(D)×293 (W)×412 (H) mm (With handle & Base)				
Inst height	226mm (From top of base to center of Miller)				
Weight	10kg (Include Base and Battery)				
Condition					
Operating Temperature	-5 to +45°C				
Storage Temperature	-20 to +60°C				
Water & Dust Resistance	IP54 (JIS C0920, IEC 60529)				

*It will be different depends on the condition.

GLS-2000

3D Laser Scanner



Standard Components

- GLS-2000
- Battery (BDC70) 4 pieces
- Battery Charger (CDC68A) 2 pieces
- Charging Cable (EDC113) 2 pieces
- Carrying case
- Silica gel
- Wiping cloth
- SD card
- SD card case
- Tooling kit
- Target sheet
- Centering target
- Instruction manual
- Warranty card

- Specifications subject to change without notice.
 - Windows® is a registered trademark of Microsoft Corporation in the United States and other countries.
 - Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Topcon is under license.
 - Other trademarks and trade names are those of their respective owners.

Your local Authorized Topcon dealer is:



TOPCON CORPORATION
 75-1 Hasunuma-cho, Itabashi-ku, Tokyo 174-8580, Japan
 Phone: (+81)3-3558-2993 Fax: (+81)3-3960-4214
 www.topcon.co.jp



Multiple Range Laser Scanner for Wide Range of Applications


- Speedy, precise scanning with variable range settings
- "Precise Scan Technology II" providing high quality point cloud data with reduced noise
- Full-dome scanning range
- World's first "Direct Height Measurement"
- Easy and accurate registration methods
- Onboard software with intuitive and easy operation

High Speed, Accuracy, Measuring Range are Enhanced and Balanced for the Highest Efficiency.

GLS-2000



Covering All BIM Applications

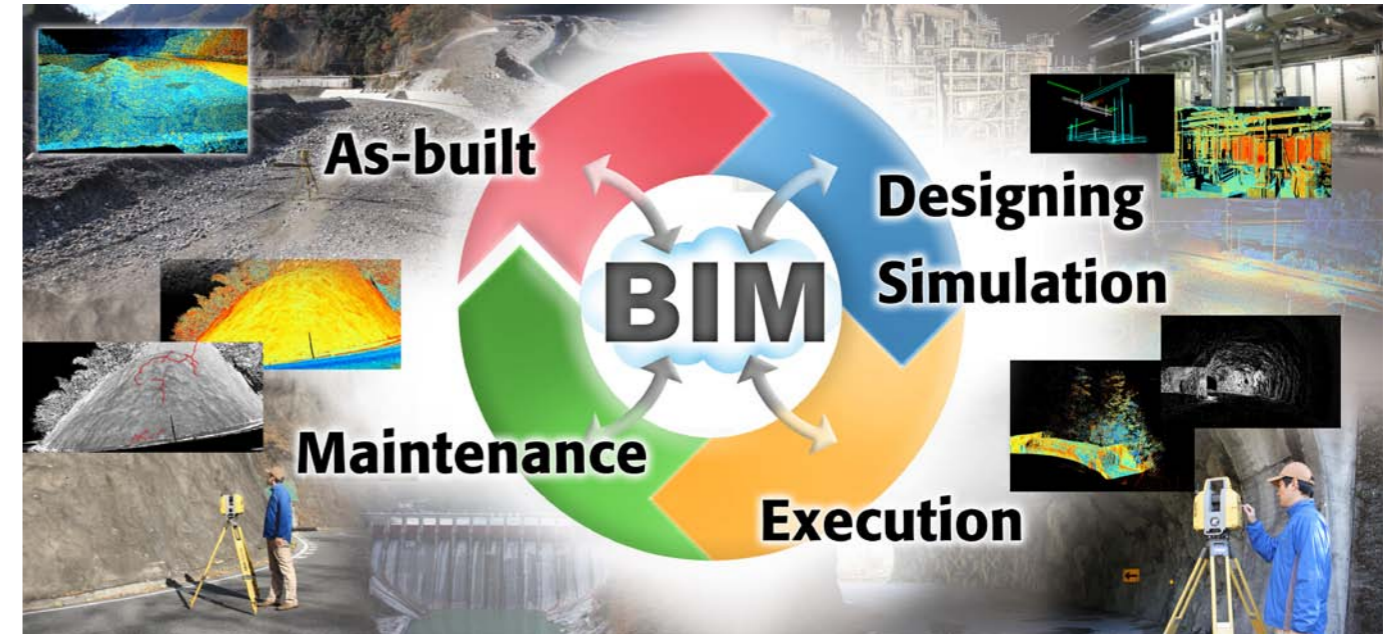

Improved Speed through Measuring Process




TOF measurement with improved speed
TOF measurement, with quality data with less noise, is further enhanced with ultra high-speed direct sampling technology, resulting in quick and accurate measurement.

Point interval at 10m distance	Measuring time*
25mm	approx 55 sec
12.5mm	approx 1 min 50 sec
6.3mm	approx 7 min 45 sec


*High speed mode




Long range scanning up to 350m
Distance measuring range is adequately selectable for applications from short distances, such as facility or interior measurement, to as-built measurement in civil engineering sites and for larger structures.



Precise Scan Technology II
The quality of point cloud data is further improved with the "Precise Scan Technology II" which provides much less noise and high precision and therefore clean up work of data in the post processing can be greatly reduced.



Realizing high-speed scanning in all work steps
With the GLS-2000, true high-speed laser scanning is realized. The GLS-2000 can provide stress-free measurement throughout an entire project with increased productivity and high efficiency.



5 types of measurement mode supported
The GLS-2000 provides a wide range of measuring modes to accommodate different job site demands to achieve accurate measurement and increased productivity regardless of site conditions.


Unique Functions: Supports simple, secure and safety in scanning applications



Selectable laser class (Class 3R/ Class 1M)
Depending on the job site conditions, the measurement mode with different laser output power can be selected between Class 3R and Class 1M which provides eye safe measurement.




Dual camera
Equipped with dual camera, 170° wide angle camera (5megapixels) and 8.9° narrow angle camera (5megapixels) which is arranged in coaxial with the measuring axis. The wide-angle camera obtains images at high speed.



Supporting various registration methods
Various registration methods are supported and can be chosen depending on site conditions for speedy, simplified and precise registration.


- Tie-point
- Traverse
- Shape matching



World's First Direct Instrument Height Measurement
The GLS-2000 has an exclusive function that accurately measures the instrument height with a one-touch operation, enabling accurate point cloud measurement.



Full-dome scanning
The instrument provides a 360° horizontal and 270° scanning measurement, capturing point clouds of objects that are difficult to measure, such as, building interiors, under bridge spans, towers, etc.




Easy and intuitive on-board control software
With the on-board control software, the scanning can be simply started with one-touch of button. Together with color graphical display, scanning operation can be intuitively proceeded.

GLS-2000 Stretches the Boundaries of Your Survey Technology

GLS-2000


Road Surface, Slope Face Profile

GLS-2000 scans road surface shapes and slope face shapes with exceptional ease and speed. The scanned data allows the sensing of ruts and bumps of road surface and can be utilized for maintenance management. Also the 3D data allows the effective and efficient detection of landslide mass in disaster area and deterioration of the slope face such as distortion or cracks.

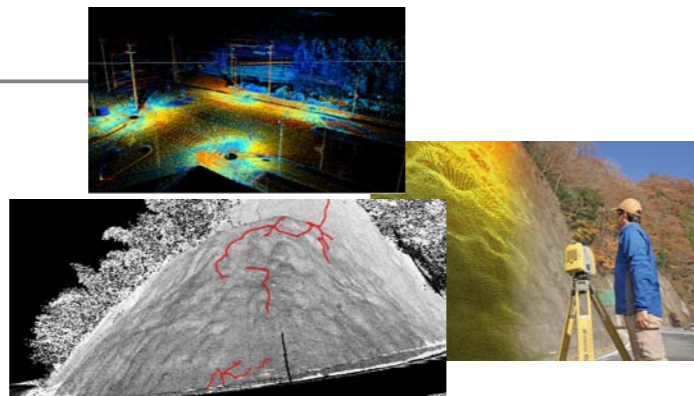


Tunnel

GLS-2000 captures 3D data of inner surfaces of tunnels quickly and efficiently. Even the most complex surface, at curves or junction points, profiles can be modeled without difficulty. Monitoring deformation of tunnel wall is an essential measure to prevent collapse of tunnels both under construction and in operation.

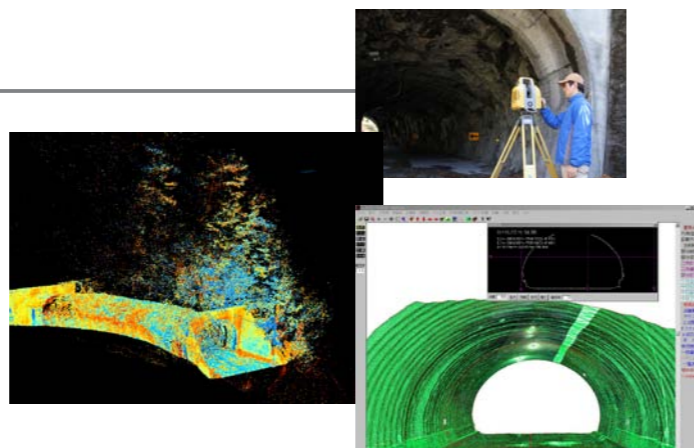


Building Construction

The laser scanning is an ideal solution for measuring the shape of the land and the 3D as-built survey in building construction site. Design drawing can be created based on the 3D point clouds with ease. As-built 3D data of the completed structure can be utilized to streamline the future maintenance of the structure.

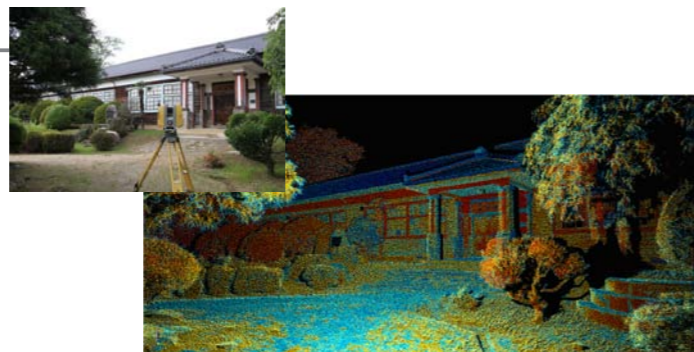

Volume Measurement

Volume measurement is indispensable for land preparation, open-pit and underground mining, waste landfills and sediment control facilities. GLS-2000 allows the operators heightened sense of safety by eliminating the need for working in an area occupied by heavy machines or in areas where access is dangerous. With 3D point clouds, a cross-section survey can be performed at any given points. High density point clouds allow for accurate calculations of volume and geometry that no other technology can offer.

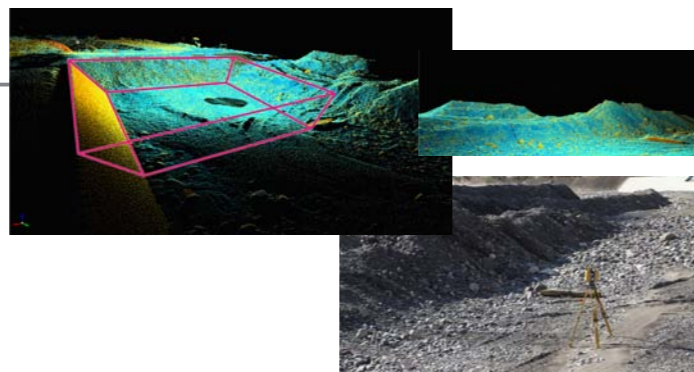


Large Structure

The scanned data of large structures allow for early detection of deteriorated areas to be maintained or reinforced. 3D data can be utilized for measurements of size and geometry, as well as volume calculations of necessary materials. Periodic monitoring is one of the most effective methods to prevent collapse of structures.




Facilities

Preliminary investigation and inspection is an indispensable process for factory renovation or relocation of factory equipment. GLS-2000 quickly measures and collects precise 3D point clouds without interrupting factory operation. High-density 3D point clouds can be widely utilized for generating schematics and simulation of piping or equipment installation. GLS-2000 can be operated safely even in areas where laser emission power is restricted; simply choose the low power (Class 1M) mode.

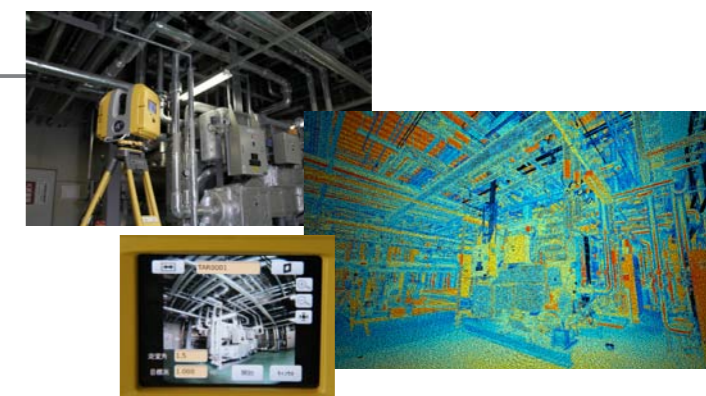

Historical Architecture / Cultural Heritage

In most cases, design schematics or drawings are not preserved for historical architecture and cultural heritage. Capturing 3D data by laser scanning is one of the most effective methods to measure these objects or artifacts without any damage to the objects. GLS-2000 obtains precise 3D point cloud data that not only replicates the objects' appearance but also material texture of the scanned objects. Schematic drawings can be created based on the 3D data for future maintenance or restoration works as well as for archiving and viewing.

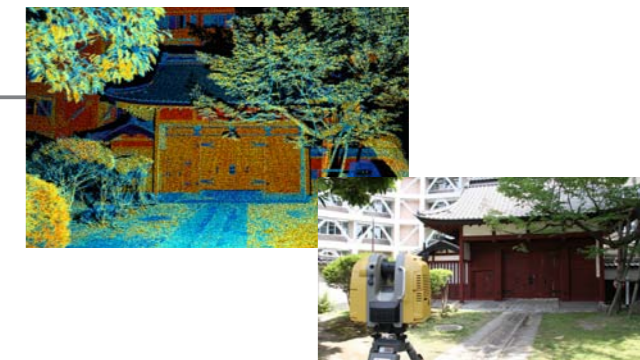

Flexible measurement range mode

Range Mode	Distance Range			Reference object to be measured
	Reflectivity			
	9%	18%	90%	
Detail	-	40m	100m	High Definition Objects, Archaeological Sites, Historical Building, etc.
High Speed	-	90m	210m	Accident Investigation, Disasters, Short Timeframe Projects
Low Power	-	90m	210m	Heavy Pedestrian Area, Laser Limitation Areas
Standard	-	150m	350m	Huge Structure, Wide Area Construction Site, Volume Measurement
Close	40m	-	-	Objects difficult to measure*


*The items which contains a lot of moisture or/and the items which has low reflectivity

PRIMARY FEATURES

- Wide angle camera
- Narrow angle camera
- Removable handle
- VGA Color Touch Display
- Battery (detachable)
- SD Card Slot
- On-board software

Precise Scan Technology II realizes highly accurate and high speed scanning


The GLS-2000 emits pulse signals three times faster than the previous model. This fast pulse signal has a clear signal wave form, and the signal timing can be detected more precisely in signal processing, which brings highly accurate measurement results. The GLS-2000 also employs an ultra high-speed ADC (analog-digital converter) with a newly developed direct sampling technique, that enables the extraction of a clear signal wave which is used in the measurement process.

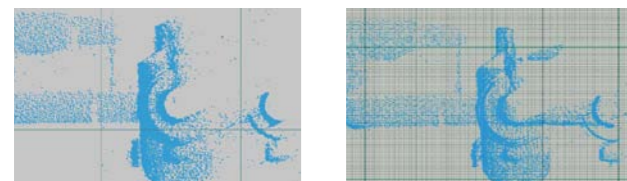

Previous method


Precise Scan Technology II

Precise Scan Technology II realizes high speed scanning with higher accuracy.

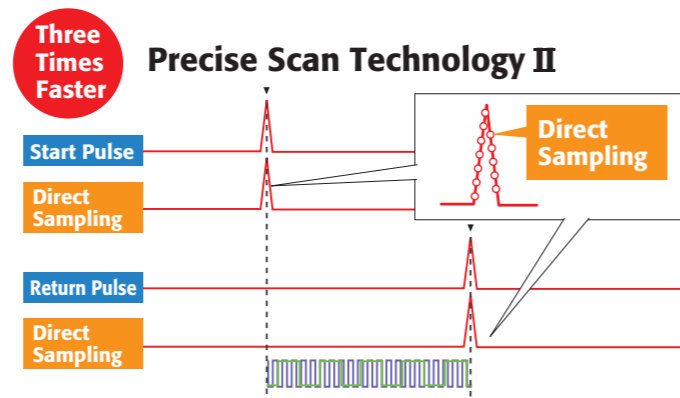

Depending on the location of the objects (as illustrated), a single emitted pulse from the instrument may be reflected partially by front objects (tree and net fence in the illustration) and the object in the back (house), and received by the instrument as multiple reflected beams. The GLS-2000 can recognize the "first pulse" and "last pulse" under such situation and offers first/last pulse selection to be taken as measuring result. This technology is quite effective, especially on job sites where there are trees or fencing in front of the object to be measured.

First pulse/ last pulse selection

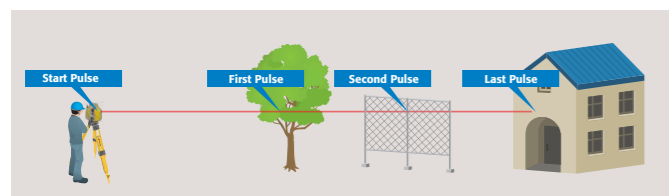

Supporting various registration methods

The GLS-2000 can execute field work similar to that of total stations by supporting various registration methods.

	Tie Point	Traverse	Shape matching
Target Setting	Necessary (many)	Necessary (1 point)	Unnecessary
Localization	Possible	Possible	Unnecessary
Working Time	Long*	Quick	Quick
Registration Accuracy	High	High	Standard

* Multiple target scanning is necessary


NEW Shape Matching Method Simple

Effective for quick measurement.




Traverse Method Simple High accuracy

Effective for long distance measurement or the site with complicated object shape by high accurate merging.

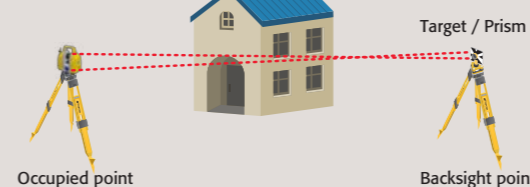

Tie-point Method High accuracy

Effective for accurate and secure merging of multiple scanned data.

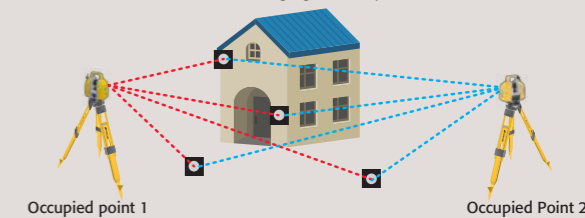


ScanMaster Office software bridging scan data and CAD

Observation


Registration

Registration (merging and unifying two groups of point clouds) is automatically performed by recognizing tie-point and/or surface shape of both point clouds.

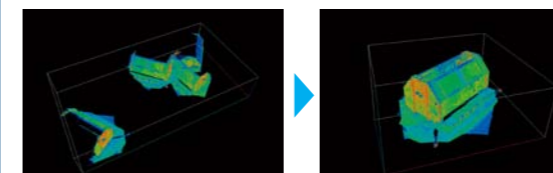

Quick and Easy Noise Cleaning

Automated region extraction quickly separates the region and noise, dramatically increasing noise cleaning efficiency.

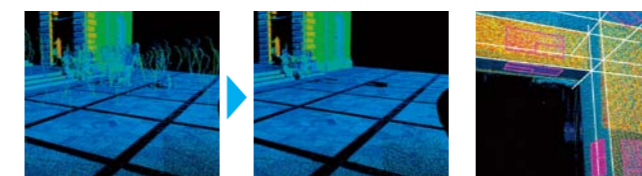

ScanMaster software provides exceptional processing power to prepare 3D data for CAD applications. Featuring an array of automated functions and instrument control capability, ScanMaster dramatically increases both office and field work efficiency.

Data Output

The GLS-2000 supports various data format, which contain TEXT, DWG, DXF and newly implemented ATSM E57. Those data is able to be used with your current CAD or software.

AutoCAD Link Option

The views of ScanMaster and AutoCAD can be synchronized and 2D and 3D drawings can be made easily. Also, ortho image of point cloud or panoramic image taken by the GLS-2000 can be imported into AutoCAD and used as a background for new object design.

